


Thermo Fibreglass fabric **DEF1000AL**

Description and Advantages

Style **DEF1000AL** standard grade fiberglass cloth is a non asbestos product with 25µ Aluminium Foil Laminated coating, used for thermal insulation.

Application

It's an excellent fabric used for welding blankets, fire protecting curtains, fire protecting work wear, pipe and furnace insulation.

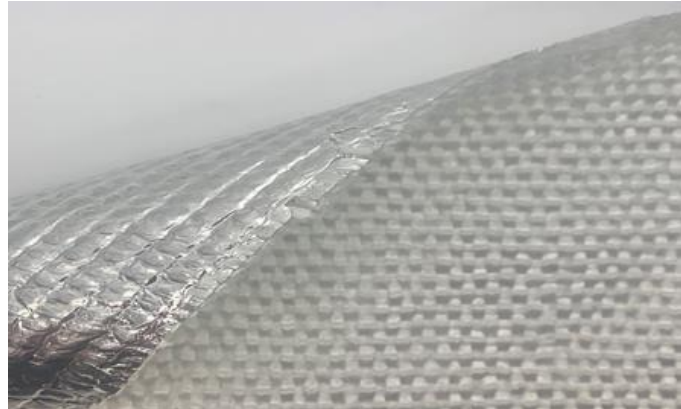

Specification Data		
WEIGHT	1000grams/m ²	
THICKNESS	1.5±0.2mm	
WIDTH	1000mm / 1500mm	
ROLL LENGTH	50 metres	
SERVICE TEMPERATURE	550°C (Aluminum foil up to 140°C)	
WEAVE	PLAIN	
WARP (strands per cm)	-	
WEFT (strands per cm)	-	
COMBUSTIBILITY	Non combustible	
TENSILE STRENGTH	Warp	2150N/cm
	Weft	1200N/cm
YARN	-	
COATINGS / FINISHES	ALUMINIUM FILM COATING	
<i>All data is compiled from routine samples and do not constitute a specification. Many of these products are based on both natural and synthetic raw material and variation will occur, especially coated textiles. Information is provided in good faith and is subject to review whenever necessary. No guarantee or warranty is implied</i>		